

Features:

- Supports 125Khz &13.56Mhz
- EM4100/EM4200
- ISO14443A
- Mifare S50/Desifre/Ultralight
- CSN card read only

Application:

- Access control
- Time attendance system
- Fingerprint system


Module NO.:

Module NO.	Interface
RDM886-T	TTL
RDM886-W	Wiegand26/34
RDM886-H	USB-HID

PIN Definition:

PIN NO.	TTL	WIEGAND	USB
1	VCC	VCC	VCC
2	RXD	D1	D-
3	TXD	D0	D+
4	GND	GND	GND
5	NC	FOR	NC

Photos:

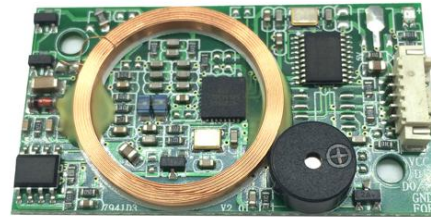

RDM886 is a dual frequency module supports 125KHz & 13.56Mhz read-only module. It has buzzer and double color led for prompt, with optional interface of WG26/34, TTL and USB-HID which is widely used for access control system, time attendance and fingerprint device.

Parameter:

	RDM886
Frequency	125KHz & 13.56MHZ
Supporting Card	EM4200, Mifare S50 Mifare Desfire, Ultralight Card
Interface	TTL/Wiegand26/34/USB-HID
Power Supply/Current	5V/12V
Read Distance	3-8cm (Depending on tags size and surroundings)
Antenna	Built-in
Operating Temperature	-20°C ~ 75°C
Dimension	47mm * 26mm * 5mm

Mechanical dimension:

